

Ai-LB-G3 Series



Model:

ASW5120-LB-G3



Optimal performance

- Low self and standby consumption
- Enhanced SOC measurement accuracy for optimal battery management
- Supports up to 1C charge / discharge rate



Safe & reliable



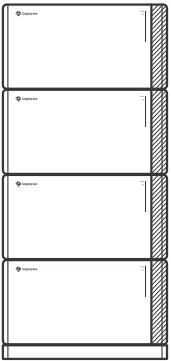
- IP66 rated design for indoor and outdoor use
- Designed in accordance with global safety standards
- Integrated fire suppression system
- Smarter and safer battery management system for precise diagnostics
- Integrated MOSFET and dual fuse protection for superior safety and



User-friendly

- Stackable up to 5 modules, 25.6 kWh per tower
- Elegant design with concealed cable management
- Compact, lightweight modules for easier handling and installation
- 5 selections for operating (LED) indicator via Solplanet App

Technical Datasheet

	Battery module	ASW5120-LB-G3			
		1	2	3	4
System Data	Module number				
	Cell type	LiFePO4			
	Rated capacity	100 Ah			
	Nominal energy ¹	5.12 kWh	10.24 kWh	15.36 kWh	20.48 kWh
	Usable energy ²	4.86 kWh	9.72 kWh	14.59 kWh	19.45 kWh
	Nominal battery voltage	51.2 V			
	Battery voltage range	40 V - 58.4 V			
	Recommended charge / discharge current	60 A	120 A	180 A ⁴	210 A ⁴
	Max. charge / discharge current	100 A	200 A ⁴	210 A ⁴	210 A ⁴
	Rated charge / discharge power	3.07 kW	6.14 kW	9.22 kW	10.75 kW
General Data	Max. charge / discharge power	5.12 kW	10.24 kW	10.75 kW	10.75 kW
	Dimensions (W / D / H)	630 / 185 / 320 mm	630 / 185 / 640 mm	630 / 185 / 960 mm	630 / 185 / 1280 mm
	Module weight	46.0 kg	92.0 kg	138.0 kg	184.0 kg
	Base weight	2.6 kg			
	Installation location	Indoor / Outdoor			
	Mounting method	Floor mounted / Wall mounted			
	Operating temperature range	Charging: -8 °C ~ 58 °C Discharging: -18 °C ~ 58 °C			
	Storage temperature range	-20 °C ~ 60 °C			
	Cooling concept	Natural convection			
	Protective class	II			
	Degree of protection	IP66			
	Relative humidity	5 % - 95 % (Non-condensing)			
	Max. operating altitude	4000 m (> 3000 m derating)			
	Communication	CAN			
	Certificate	IEC 62619, IEC 62040, IEC 62477, IEC 63056, IEC 61000			
	Cycle life ³	6000 times			
	Round-trip efficiency	≥ 95 %			

1. Nominal energy is defined under the following conditions: battery voltage 40 V - 58.4 V, 0.5C charge & discharge at 25 °C.

2. Usable energy is defined under the following conditions: 0.5C charge & discharge at 25°C, 95% DOD.

3. Cycle life is defined under the following conditions: 0.5C charge & discharge at 25°C (One cycle a day), 90% DOD, 70% EOL.

4. The battery must be connected to 2 sets of 4 AWG positive and negative output cables. Please refer to the user manual for details.

